

C-BIOPZ



The Flooring Solutions

your color story

PATTERNS

50cm x 50cm 60cm x 60cm

INDEX

		PAGE
C-BIOPZ	1310,1360,1361	2
C-BIOPZ	1310,1312	3
C-BIOPZ	1310+1315	4
C-BIOPZ	1330	5
Colours		6
Specification		7



CBIOPZ 13, 1310#



CBIOPZ 13, 1360#, 1361#



CBIOPZ 13, 1310#, 1312#



CBIOPZ 13, 1310#



CBIOPZ 13, 1310#, 1315#



CBIOPZ 13, 1315#




CBIOPZ 13, 1330#




CBIOPZ 13, 1330#



CBIOPZ1310

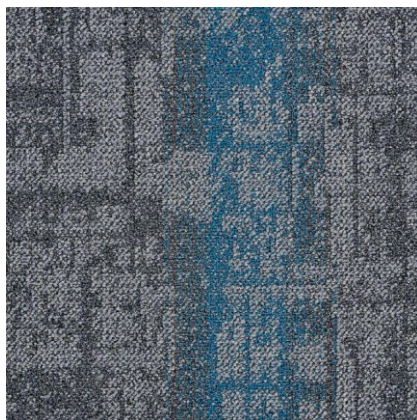

CBIOPZ1312

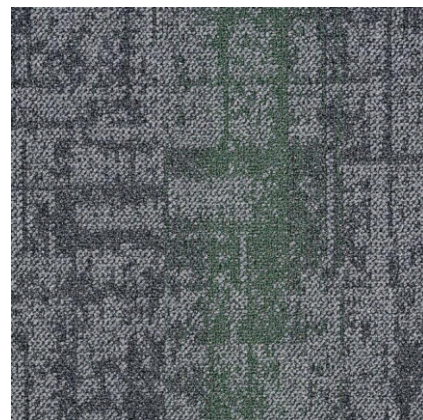


CBIOPZ1315




CBIOPZ1320



CBIOPZ1330

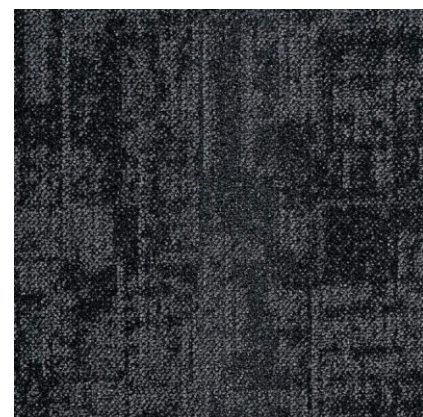

CBIOPZ1340

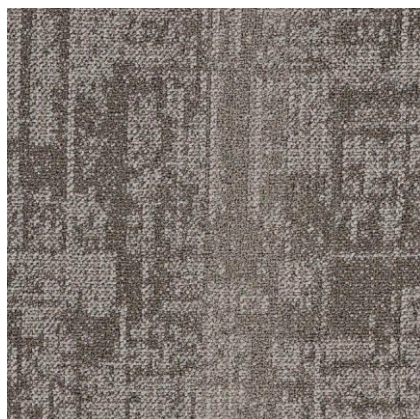

CBIOPZ1360




CBIOPZ1361

Specifications

Product Name	C-BIOPZ
Product Code	C-BIOPZ
Tufted construction	Multi-Level loop
Fiber	100% Nylon
Dye method	Solution Dyed
Gauge	1/12
Pile weight(g/m ²)	20 OZ/yd ²
Tile size(mm)	500x500
Pile height(mm)	4.0 ± 0.5
Total thickness(mm)	6.5 ± 0.5
Standard Backing	Polyolefin-Bac
Green Carpet (VOC)	CRI Green Label GLP 6331,6332

Installation Methods

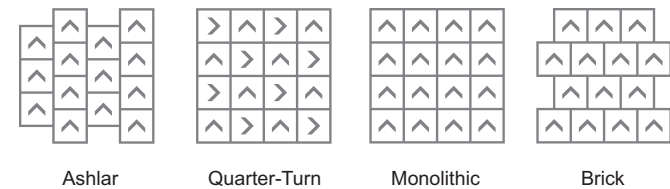

Performance

Radiant Panel	Passes (ASTM E 648)
Methenamine Pill	Passes (ASTM D2859)
Smoke Density	Passes (ASTM E 662)
Fire Resistance	Passes (EN 135-01)
Delamination	Excellent (No Separation)
Dimensional Stability	<0.2% (AACHEN)
Tuft Bind	Passes (ASTM D1335)
Static Propensity	5 (AATCC-134)
Stain Resistance	8 (AATCC-175)
Color Fastness to Light	5 (AATCC-16 E)
Color Fastness to Crocking	5 (AATCC-165)
Color Fastness to Water	5 (AATCC-107)
Castor Chair	3.5 (BS EN 985)
Hexapod Drum	Passes (ASTM D5252)
Green Carpet(VOC)	CRI Green Label
Acoustic-Nylon	BS EN ISO 354
Sound Absorption	BS EN ISO 10140

Warranties

10 years limited warranty:
 No more than 10% face yarn loss by weight under normal use
 Limited static warranty.
 Limited delamination warranty under normal use.



Anti-fouling	Anti-static	Environmental	Passed various tests	Fashion colors	100%B,C,F Yarn
Reduced Flammability	Isolation acoustic	Colorfast	Chair roulettes	No edge ravel	Wear resistance
Soil Resistance	Wear Warranties	Dimensional Stability	Long life-span	Easy to transport	Non-moid