




COMMERCIAL TYPE NON-DIRECTIONAL HOMOGENEOUS COMPACT VINYL FLOORING





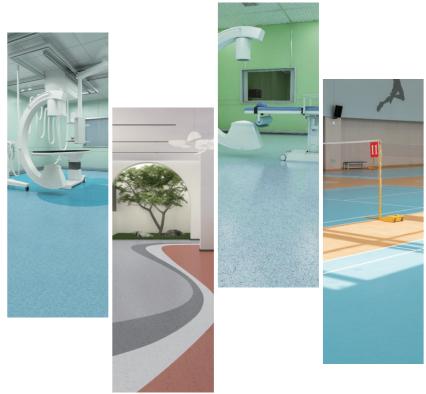


## TECHNICAL DATA

~	Total Thickness EN 428	2mm
	Roll Width EN 426	2m
	Roll Length EN 427	20m
	Weight EN 430	3100g/m2
	European Classification EN 685	34/43
	Abrasion Group EN 660	Т
B <sub>II</sub> -s1	Fire Rating EN 13501	Bfl-s1
T <sub>DS</sub>	Slip Resistance DIN 51130	R9
K Z	Dimension Stability EN 434	≤0.2%
	Residual Indentation EN 433	0.03mm
	Formaldehyde Emission EN 717-1	ND
52	Flexibility EN 435	No crack
	Thermal Conductivity EN 14041	0.043W/m • K
	Static Electrical Propensity EN 1815	< 2kV
<b>F</b>	Color Fastness EN ISO 105-B02	≥6
	Castor Chair Test EN 425	Suitable
	Sound Absorption EN ISO 717/2	Approx. 4dB
	Stain and Chemical Resistance EN 423	Great
	TVOC after 28 days ISO 16000	<10 µ g/m3
	Cleanroom Test ASTM F24 / ISO 14644-1	Class A
	Ease of Decontamination ISO 8690	Good
	Bacteria Resistance EN ISO 846 Part C	Does not favour growth
	Seam Strength (Average) EN 684	≥240N/50mm
	Seam Strength (Individual) EN 684	≥180N/50mm





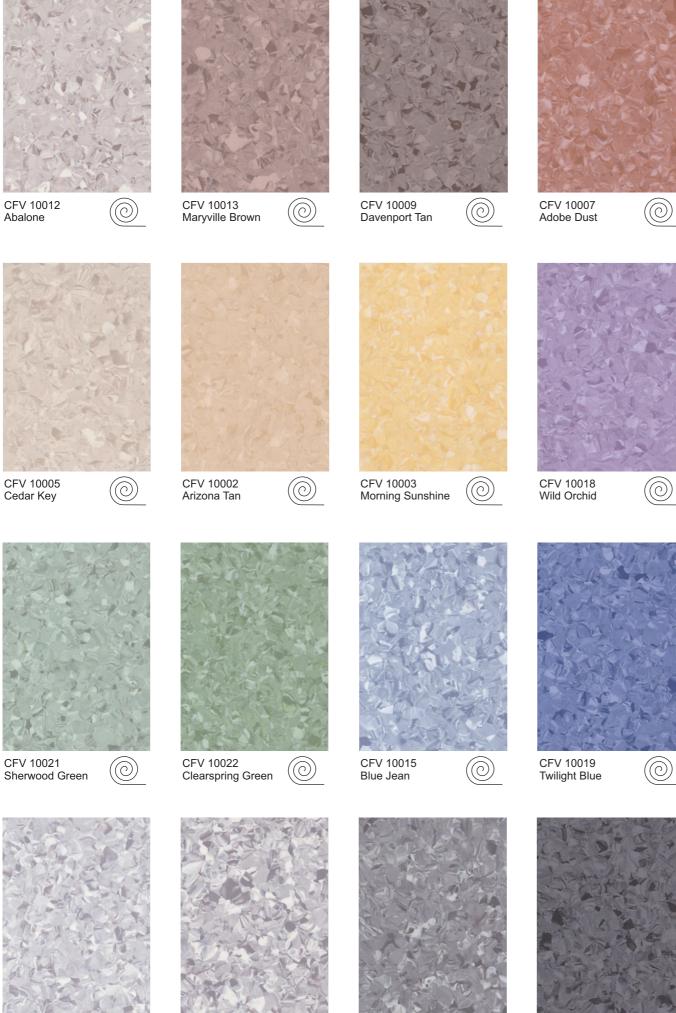
















CFV 10027 Whale Grey





CFV 10030 Black Jack



