




cfloors
The Flooring Solutions

C-NET



CNET-NW05 





CNET-NW-02




CNET-NW-02+09





CNET-NW-08+11



CNETNW-08+09+10



CNET-NW-02

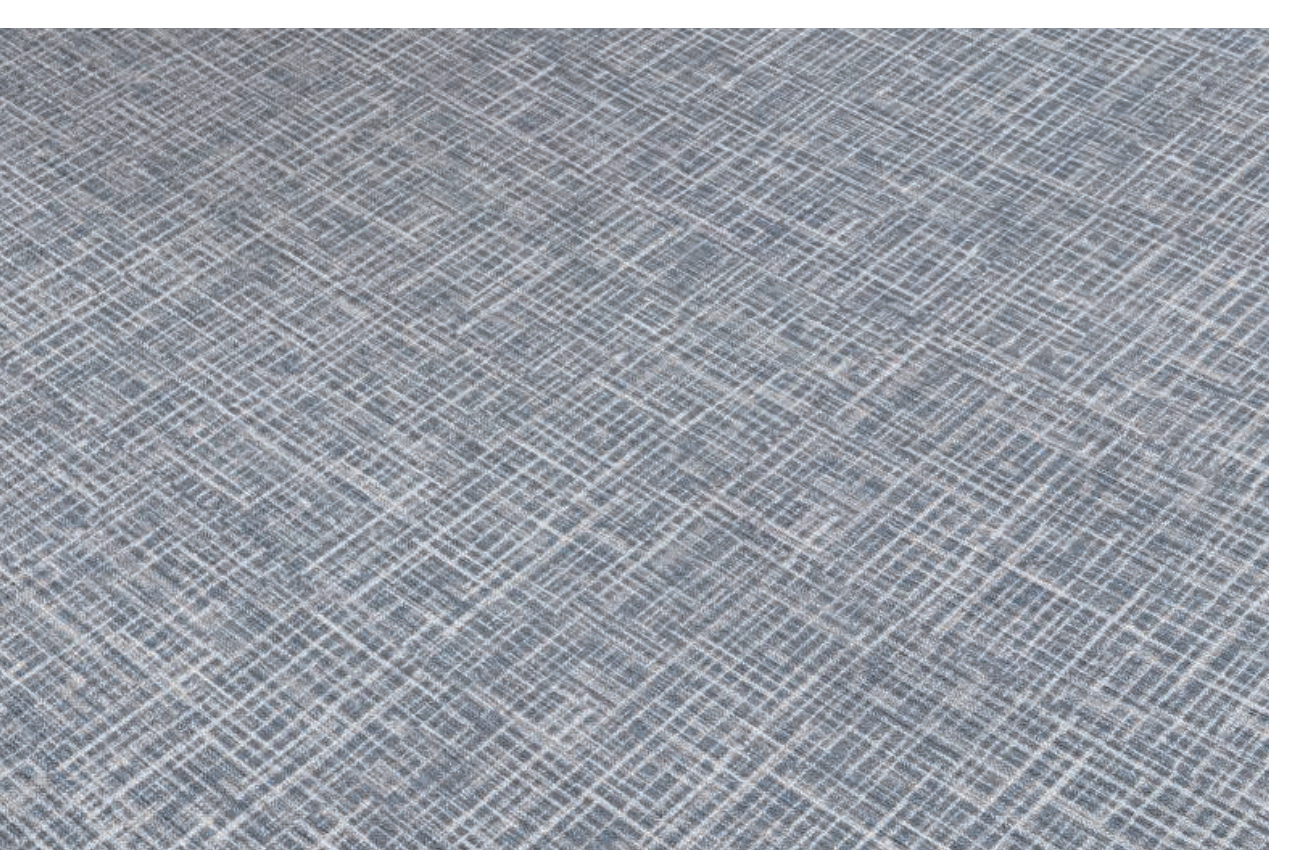





CNET-NW-02




CNET-NW-05




CNET-NW-07




CNET-NW-08



CNET-NW-09



CNET-NW-10



CNET-NW-11


Specifications

Product Name	C-NET
Product Code	C-NET
Tufted construction	Tufted Patterned Loop
Fiber	100% Nylon
Dye method	Solution Dyed
Gauge	1/12
Tile size(mm)	600x600
Pile height(mm)	4.0 ± 0.5
Total thickness(mm)	6.0 ± 0.5
Standard Backing	PE or EPU

Installation Methods




Ashlar



Quarter-Turn



Monolithic



Brick

Performance

Radiant Panel	Passes (ASTM E 648)
Methenamine Pill	Passes (ASTM D2859)
Smoke Density	Passes (ASTM E 662)
Fire Resistance	Passes (EN 135-01)
Delamination	Excellent (No Separation)
Dimensional Stability	<0.2% (AACHEN)
Tuft Bind	Passes (ASTM D1335)
Static Propensity	5 (AATCC-134)
Stain Resistance	8 (AATCC-175)
Color Fastness to Light	5 (AATCC-16 E)
Color Fastness to Crocking	5 (AATCC-165)
Color Fastness to Water	5 (AATCC-107)
Castor Chair	3.5 (BS EN 985)
Hexapod Drum	Passes (ASTM D5252)
Green Carpet(VOC)	CRI Green Label
Acoustic-Nylon	BS EN ISO 354
Sound Absorption	BS EN ISO 10140

Warranties

10 years limited warranty:
No more than 10% face yarn loss by weight under normal use
Limited static warranty.
Limited delamination warranty under normal use.

