



Fifty

 **Cflors**
The Flooring Solutions



SOHO 10



FLORIDA 1



CANASIA




WAGNER 01



HELLFORD 03



LUIS 06

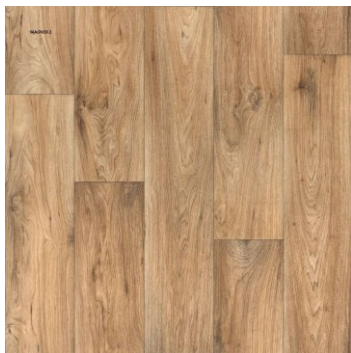

WAGNER 02



AKRON 10



ELIOT 08



AKRON 12



SOHO 09


















GEA 20




LUIS 08

Fifty

Technical Characteristics:

ISO 10874		Classification - residential	
ISO 24346		Total thickness	2.00 mm
ISO 24340		Wear layer thickness	0.13 mm
ISO 24341		Total weight	1.35 kg/m2
ISO 24341		Roll width	4m
ISO 24341		Roll length	30 lm
ISO 24341		Residual indentation	≤0.35 mm
ISO 24341		Dimensional stability	<0.1%
ISO 24341		Castor chair	<input checked="" type="checkbox"/>
ISO 24341		Floor heating suitability	<input checked="" type="checkbox"/>
ISO 24341		Fire resistance	
ISO 24341		Light fastness	7/8
ISO 24341		Sound absorption	15 dB

PRODUCT STRUCTURE:

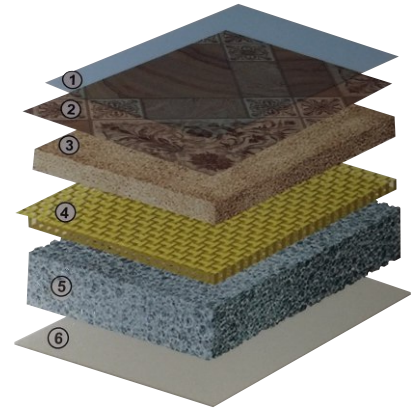

1. Protective layer
2. Design
3. Top compact
4. Glass fiber
5. Foam backing
6. Back Print

Stock available

FLOOR MUST BE GLUED

Across Whole Surface, Independent On Installation Area