




FW #4 Ashlar


Fairview

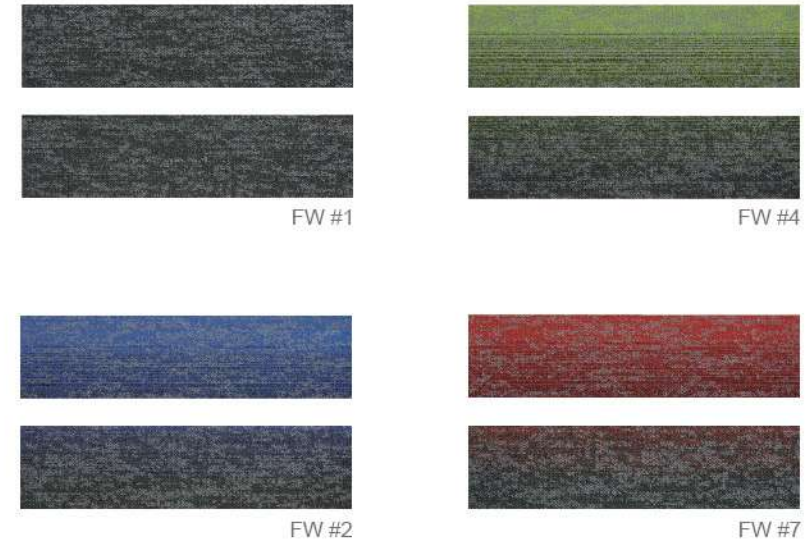

Specifications

Construction	multi-level loop
Fiber	100% PP
Dye Method	solution dyed
Gauge	1/12"
Stitches	10 per inch
Pile Weight	20 OZ / yd ²
Pile Height	4mm±0.5mm
Total Thickness	7mm±0.5mm
Backing	PVC with fiberglass
Tile Size	25cm x 100cm

Installation Method



Performance

Flammability:	Passes (ASTM E648)
Smoke Density:	Passes (ASTM E662)
Static Propensity:	≤3.0kV (AATCC 134)
Soil & Stain Protection:	Excellent Soil Resistance
Color Fastness to Light:	5 (AATCC-16E)
Dimensional Stability:	<0.2% (AACHEN)
Hexapod:	2.5 (ASTM D5252)

Warranties

5 years limited warranty:
 No more than 10% face yarn loss by weight under normal use.
 Limited static warranty.
 Limited delamination warranty under normal use.



FW #1 #7 Herringbone