



Hemlock

THE ART OF FLOORING *D30*





D05







D08







D36A



D01



D05



D06



D07



D08



D11



D16



D22



D36A



D46



D54



D61




D81



D422

LET US
HELP YOU
ACHEIVE
YOUR GOALS

- ①UV coating
- ②High-density wear layer
- ③Printing layer
- ④Fiber-glass layer
- ⑤Backing layer

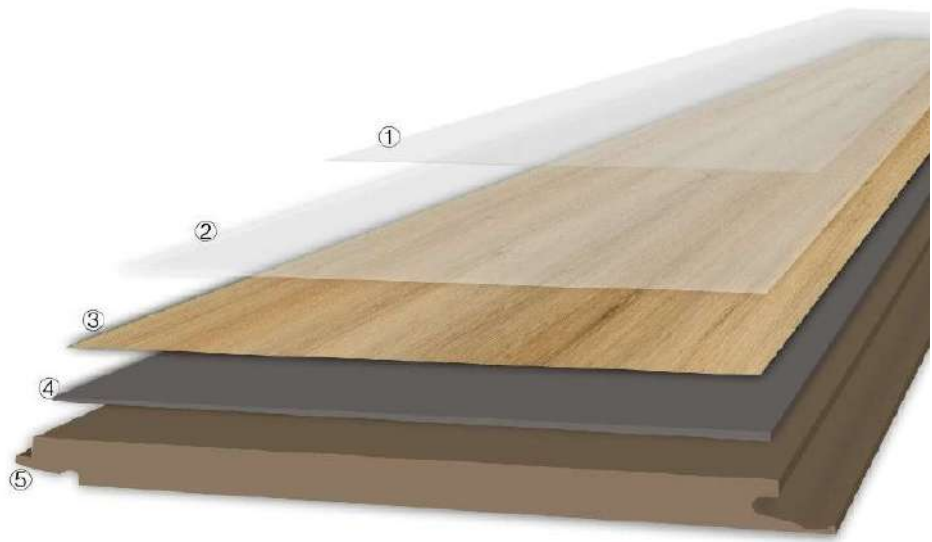

Click Vinyl Tile is an innovative form of vinyl flooring. It is becoming an increasingly popular and affordable alternative to wood or stone. The realistic look of either wood, stone or ceramic tile is extremely hard wearing and resilient to daily wear and tear. It has a scratch resistant surface and is waterproof, making it ideal for any area.

The product is made up of multiple thin layers so that the flooring is still flexible but very durable and easy to look after. The Click system ensures fast & simple installation.

CHARACTERISTICS STANDARD RESULT

Size	EN 427	180mm x 1220mm
Squareness / Straightness	EN 427	<0.2mm
Overall Thickness	EN 428	4.0mm
Wear Layer Thickness	EN 428	0.3mm
Warp	EN 434	±0.5mm (80 °C, 6h)
Peeling Resistance	EN 431	Length 1068N, Width 1089N
Dimensional Stability	EN 434	<0.1 % (80 °C, 6h)
Wear Resistance	EN 660-2	≤0.015g/1000turns
Slip Resistance	DIN 51130	R9
Castor chair test	EN 425	No delamination
Residual Indentation	EN 433	<0.1mm
Mildew Resistance	ASTM G21	Level 1
Toxicity	EN 71-3	Pass
Corrosion Resistance	EN 423	Level 0
Color Fastness	ISO 105 B02	>6
Fire Resistance	ASTM E84-03	Bfl-S1
Gloss	—	+2gu