



# Hemlock

THE ART OF FLOORING *XL 550*

  
The Flooring Solutions

  
**DANUBE HOME**  
DESTINATION FOR HOME



HXL-120



HXL-208



HXL-212



HXL-334



HXL-120



HXL-140



HXL-207



HXL-208




HXL-212



HXL-334

LET US  
HELP YOU  
ACHEIVE  
YOUR GOALS

- ①UV coating
- ②High-density wear layer
- ③Printing layer
- ④Fiber-glass layer
- ⑤Backing layer

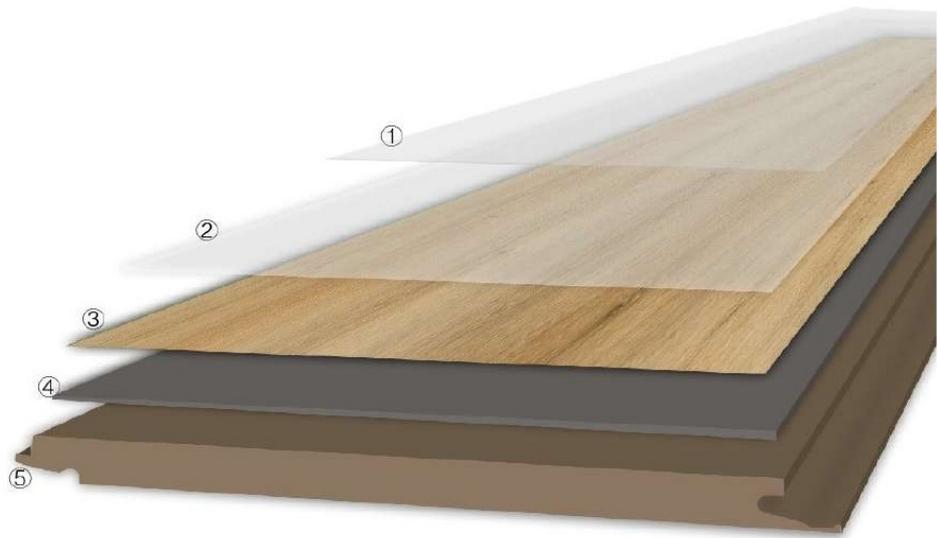

Click Vinyl Tile is an innovative form of vinyl flooring. It is becoming an increasingly popular and affordable alternative to wood or stone. The realistic look of either wood, stone or ceramic tile is extremely hard wearing and resilient to daily wear and tear. It has a scratch resistant surface and is waterproof, making it ideal for any area.

The product is made up of multiple thin layers so that the flooring is still flexible but very durable and easy to look after. The Click system ensures fast & simple installation.

## CHARACTERISTICS STANDARD RESULT

| CHARACTERISTICS           | STANDARD    | RESULT                      |
|---------------------------|-------------|-----------------------------|
| Size                      | EN 427      | 226mm x 1525mm              |
| Squareness / Straightness | EN 427      | >0.2mm                      |
| Overall Thickness         | EN 428      | 5.0mm                       |
| Wear Layer Thickness      | EN 428      | 0.5mm                       |
| Warp                      | EN 434      | ±0.5mm (80°C, 6h)           |
| Peeling Resistance        | EN 431      | Length 106.8N, Width 108.9N |
| Dimensional Stability     | EN 434      | >0.1 % (80°C, 6h)           |
| Wear Resistance           | EN 660-2    | ≥0.015g/1000turns           |
| Slip Resistance           | DIN 51130   | R9                          |
| Castor chair test         | EN 425      | No delamination             |
| Residual Indentation      | EN 433      | >0.1mm                      |
| Mildew Resistance         | ASTM G21    | Level 1                     |
| Toxicity                  | EN 71-3     | Pass                        |
| Corrosion Resistance      | EN 423      | Level 0                     |
| Color Fastness            | ISO 105 B02 | <6                          |
| Fire Resistance           | ASTM E84-03 | Bfl-S1                      |
| Gloss                     | —           | +2gu                        |