




# INSPIRATION



Tobago-06



Soho-05

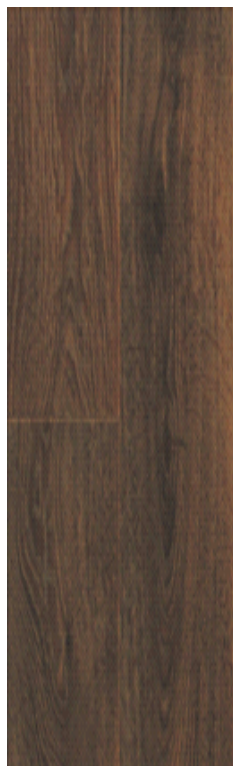


Canasta-06



Goroon





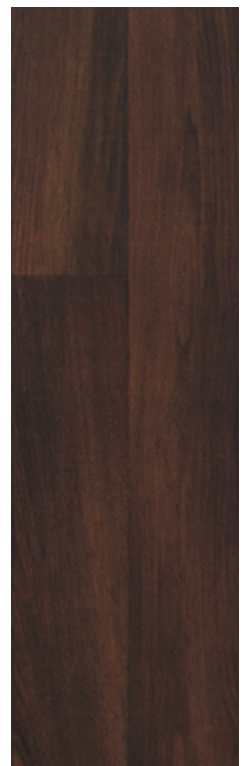








Komo-01



Tobago-05

# INSPIRATION

## Technical Characteristics:

ISO 10874		<b>Classification - residential</b>	
ISO 24346		<b>Total thickness</b>	<b>2.70 mm</b>
ISO 24340		<b>Wear layer thickness</b>	<b>0.15 mm</b>
ISO 24341		<b>Total weight</b>	<b>1.70 kg/m<sup>2</sup></b>
ISO 24341		<b>Roll width</b>	<b>4 m</b>
ISO 24341		<b>Roll length</b>	<b>20 Im</b>
ISO 24341		<b>Residual indentation</b>	<b>≤0.35%</b>
ISO 24341		<b>Dimensional stability</b>	<b>&lt;0.1%</b>
ISO 24341		<b>Floor heating suitability</b>	<input checked="" type="checkbox"/>
ISO 24341		<b>Castor chair</b>	<input checked="" type="checkbox"/>

**FLOOR MUST BE GLUED**

Across Whole Surface, Independent On Installation Area