



MAJESTIC




Wagner 2



Archer 5



Florida 1

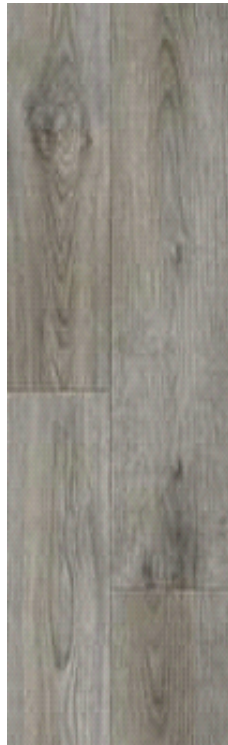

Luis 5




Living Oak
Antrac



Carter 4



Muskat 3

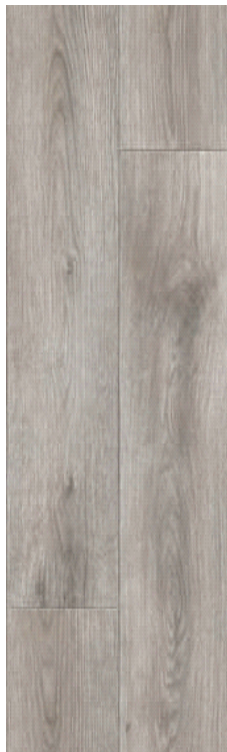

Luis 10


















Akron 12




Soho 10

Technical Characteristics:

ISO 10874		Classification - residential	
ISO 24346		Total thickness	2.50 mm
ISO 24340		Wear layer thickness	0.15 mm
ISO 24341		Total weight	1.60 kg/m²
ISO 24341		Roll width	2.5 m / 3m / 3.5 m / 4 m
ISO 24341		Roll length	2.5m / 3m / 3.5m 4m - 30m (05-30)
ISO 24341		Residual indentation	≤0.35 mm
ISO 24341		Dimensional stability	<0.1%
ISO 24341		Castor chair	<input checked="" type="checkbox"/>
ISO 24341		Floor heating suitability	<input checked="" type="checkbox"/>
ISO 24341		Fire resistance	
ISO 24341		Light fastness	7/8
ISO 24341		Sound absorption	20 dB

PRODUCT STRUCTURE:

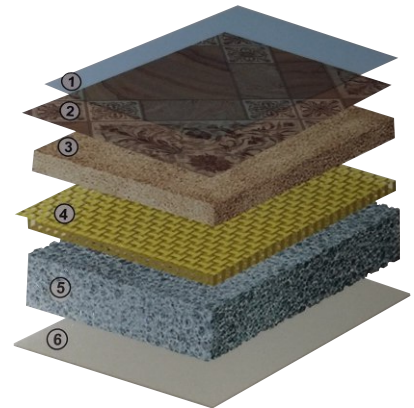

1. Protective layer
2. Design
3. Top compact
4. Glass fiber
5. Foam backing
6. Back Print

FLOOR MUST BE GLUED

Across Whole Surface, Independent On Installation Area