



# MAXIMUS DRYBACK

  
The Flooring Solutions



NEW ENGLAND OAK MISTY 93  
VDNWE5A93018122C15



HIGHLAND OAK ROASTED  
VDHIG5A34018122C15



HIGHLAND OAK CLASSIC  
VDHIG5A33018122C15



FRENCH OAK POLAR  
VDFRE5R03018122C15



FRENCH OAK LINEN  
VDFRE5R30018122C15



FRENCH OAK DESERT  
VDFRE5R33018122C15



FRENCH OAK STORM  
VDFRE5R92018122C15



NORWEGIAN WOOD ARCTIC  
VDNOR5R09018122C15



NRWEGIAN WOOD FJORD  
VDNOR5R39018122C15



NORWEGIAN WOOD THUNDER  
VDNOR5R49018122C15



NEW ENGLAND OAK  
MISTY 93

VDNWE5A93018122C15



HIGHLAND OAK  
ROASTED 34

VDHIG5A34018122C15



HIGHLAND OAK  
CLASSIC 33

VDHIG5A33018122C15



FRENCH OAK  
POLAR 03

VDFRE5R03018122C15



FRENCH OAK  
LINEN 30

VDFRE5R30018122C15



FRENCH OAK  
DESERT 33

VDFRE5R33018122C15




FRENCH OAK  
STORM 92

VDFRE5R92018122C15



NORWEGIAN WOOD  
ARCTIC 09

VDNOR5R09018122C15

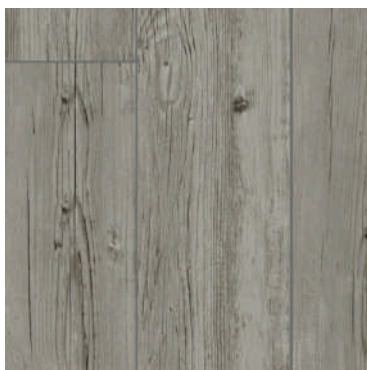

NORWEGIAN WOOD  
FJORD 39

VDNOR5R39018122C15



NORWEGIAN WOOD  
THUNDER 49

VDNOR5R49018122C15

# MAXIMUS DRYBACK

## Technical Specification ISO10582 / EN14041

Thickness	2.50 mm
Wearlayer	0.55 mm
Weight per sqm	ca. 4310 g/m <sup>2</sup>
Surface PUR coating	Scratchmaster® top layer
Classification	23 Domestic Heavy - 33 Commercial Heavy - 42 Industrial General



## Packaging

Size plank	178x1219 mm
Planks / carton	15 planks / carton = 3.25 m <sup>2</sup> / carton

## Warranty

25 years Residential - 15 years Commercial

## Performance

Reaction to fire	Bfl-S1
Slip resistance	DS
Slip restraint (dynamic coefficient of friction)	R10
Thermal resistance R value	0.028 (m <sup>2</sup> .K)/W
Underfloor heating	Yes, max. 27°C
Electrostatic performance	< 2 kV (antistatic)
Residual indentation	<0.1 mm
Dimensional stability	≤ 0.15%
Curling	pass
Castor chair resistance	pass, Type W
Colour fastness	>6
Impact sound insulation	3dB (ΔLw)
Chemical / Stain resistance	pass
Abrasion resistance	class T
French VOC regulation	A+
Indoor AIR quality	Greenguard GOLD
Indoor AIR quality	Floorscore
Content of pentachlorophenol	PCP under detection limit
Formaldehyde emissions	NA HCHO (has not been added)
Phthalate free	Yes
CE marking - EN 14041	

