




VALIANT

CLICK 430

LET US
HELP YOU
 ACHEIVE
YOUR GOALS

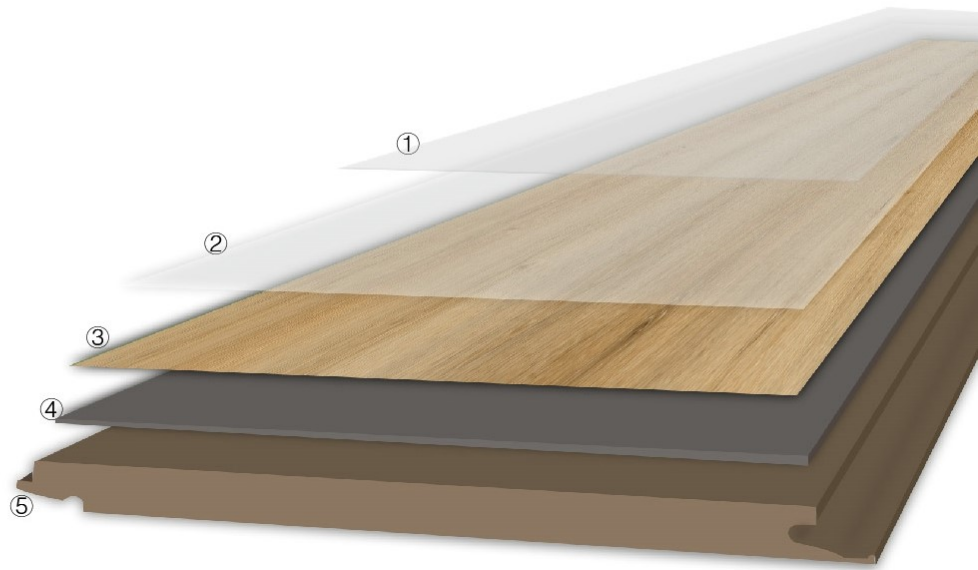

- ① UV coating
- ② High-density wear layer
- ③ Printing layer
- ④ Fiber-glass layer*
- ⑤ Backing layer

Click Vinyl Tile is an innovative form of vinyl flooring. It is becoming an increasingly popular and affordable alternative to wood or stone. The realistic look of either wood, stone or ceramic tile is extremely hard wearing and resilient to daily wear and tear. It has a scratch resistant surface and waterproof making it ideal for any area.

The product is made up of multiple thin layers so that the flooring is still flexible but very durable and easy to look after. Click system ensures fast and simple installation.

CHARACTERISTICS	STANDARD	RESULT
Size	EN 427	180mm*1220mm
Squareness / Straightness	EN 427	<0.2mm
Overall thickness	EN 428	4.0mm
Wear Layer thickness	EN 428	0.3mm
Warp	EN 434	±0.5mm (80°C, 6h)
Peeling resistance	EN 431	Length 106.8N, Width 108.9N
Dimension stability	EN 434	<0.1% (80°C, 6h)
Wear resistance	EN 660-2	≤0.015g/1000turns
Slip resistance	DIN 51130	R9
Castor chair test	EN 425	No delamination
Residual indentation	EN 433	<0.1mm
Mildew resistance	ASTM G21	Level 1
Toxicity	EN 71-3	Pass
Corrosion resistance	EN 423	Level 0
Color fastness	ISO 105 B02	>6
Fire resistance	ASTM E84-03	Bfl-S1
Gloss	-	±2gu



VT43010

180MM*1220MM



VT43011
180MM*1220MM



VT43007
180MM*1220MM



VT43002

180MM*1220MM



VT43008

180MM*1220MM



VT43013
180MM*1220MM



VT43001

305MM*610MM



VT43012

305MM*610MM



VT43006

305MM*610MM



VT43004

305MM*610MM



VT43009

305MM*610MM



VT43005

305MM*610MM



VT43003

305MM*610MM