



VALIANT

CLICK 550



VT 55014
180MM*1220MM



VT 55014

180MM*1220MM

The image displays a close-up, vertical view of a wood grain texture. The grain is characterized by a series of wavy, vertical lines that create a sense of depth and movement. The color palette is a range of natural wood tones, from light beige and cream to various shades of tan, brown, and dark chocolate, highlighting the natural variations in the wood's growth rings and knots.

VT 55015
180MM*1220MM



VT 55015
180MM*1220MM



VT 55018

180MM*1220MM



VT 55018
180MM*1220MM

The image shows a close-up, vertical view of a light-colored wood surface. The wood grain is prominent, with various wavy and straight patterns. There are several knots and darker spots scattered across the surface, giving it a natural, organic appearance. The color is a warm, light tan or beige.

VT 55020

180MM*1220MM



VT 55020
180MM*1220MM

The image shows a close-up, vertical view of a wood grain. The wood has a warm, medium-brown tone with a prominent, slightly wavy grain pattern. There are several knots and natural imperfections visible throughout the surface, giving it a rustic and organic appearance. The lighting is even, highlighting the texture of the wood fibers.

VT 55017

180MM*1220MM



VT 55017
180MM*1220MM


The image shows a close-up, vertical view of a dark brown wood surface. The wood grain is prominent, running vertically, with various knots and natural imperfections scattered throughout. The lighting is slightly uneven, creating subtle gradients of dark brown and black tones.

VT 55019

180MM*1220MM



VT 55019
180MM*1220MM

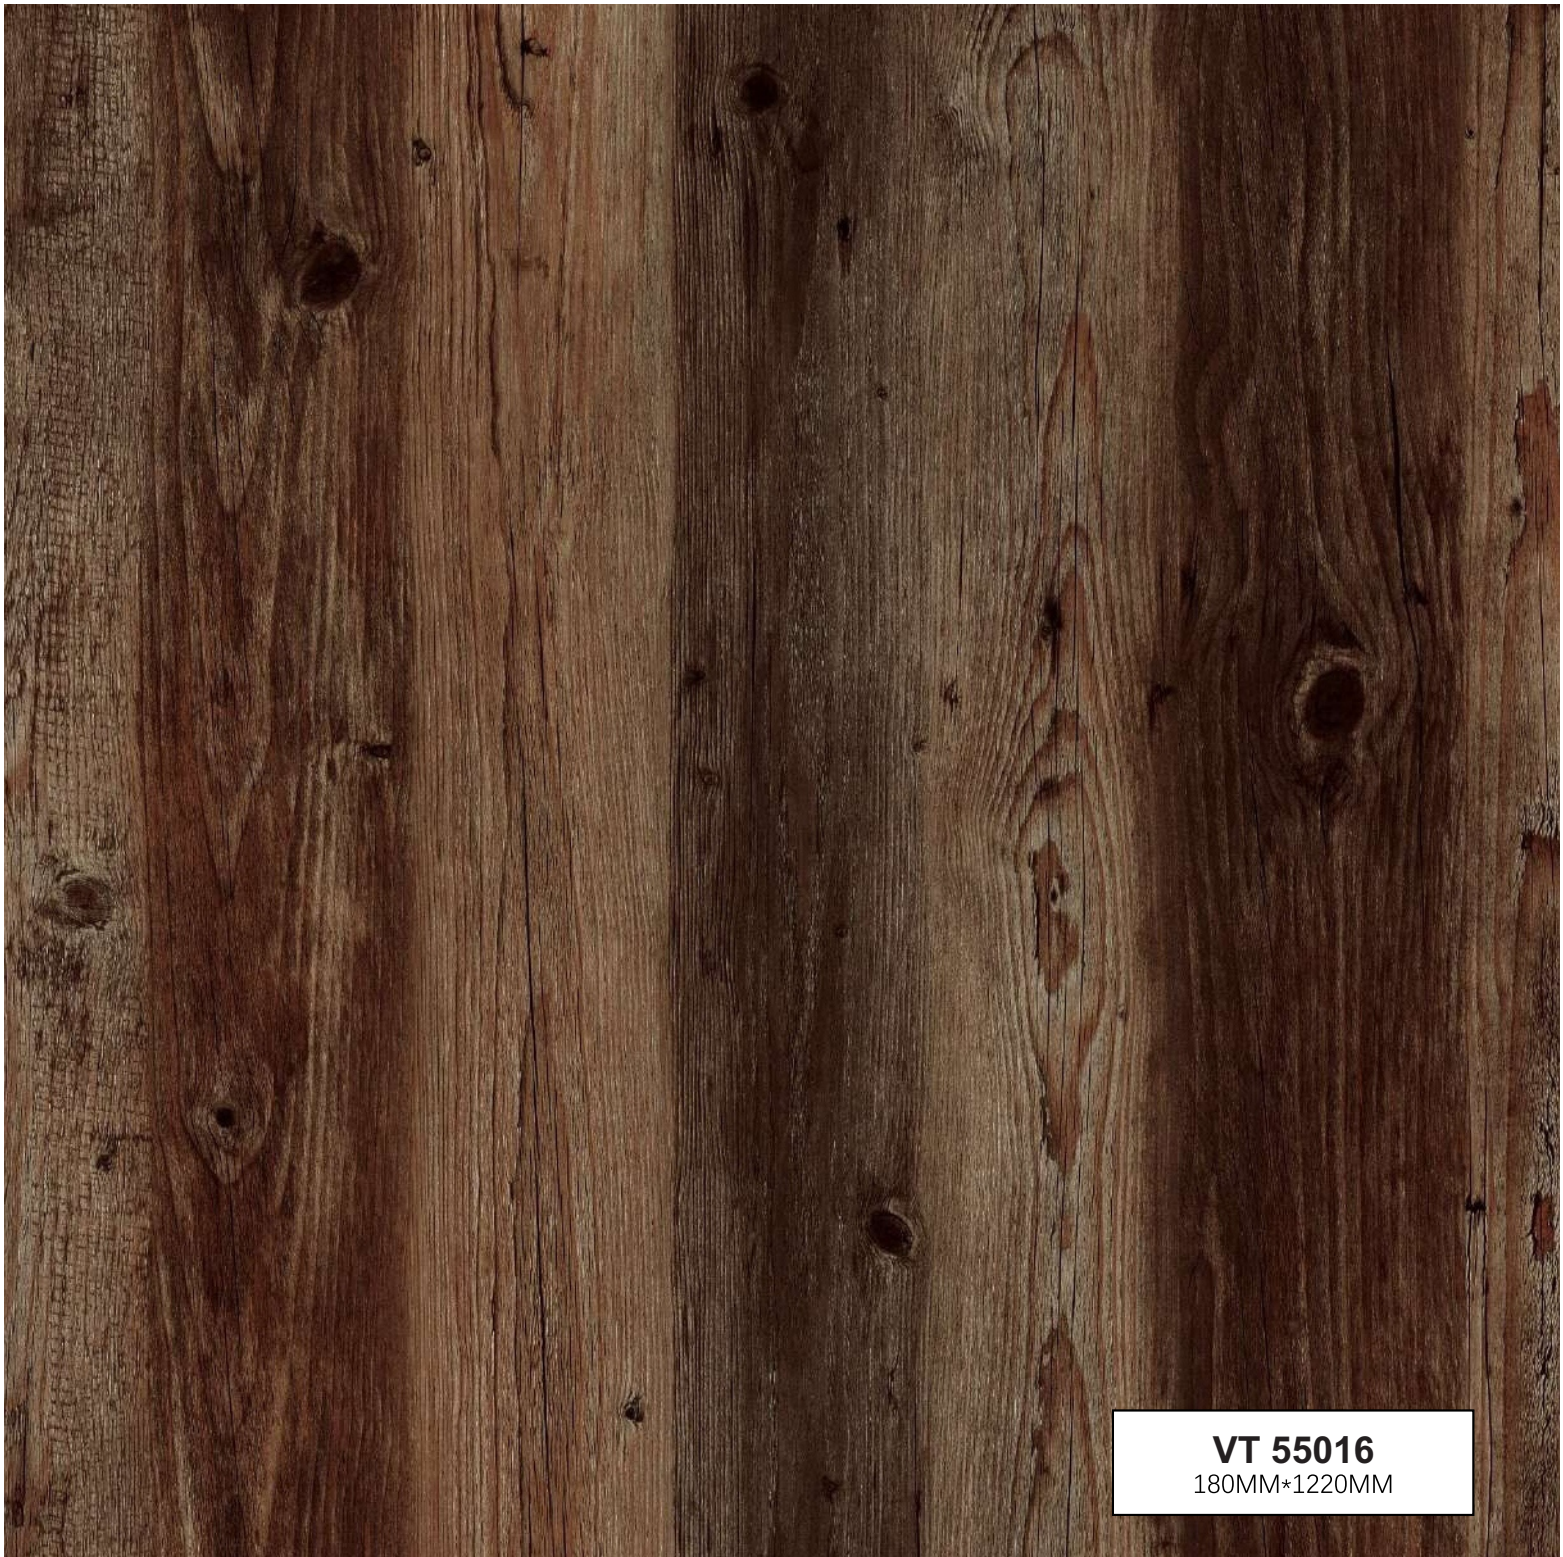

VT 55016

180MM*1220MM



VT 55016
180MM*1220MM

VT 55021
305MM*610MM



VT 55021
305MM*610MM



VT 55023
305MM*610MM



VT 55023
305MM*610MM


VT 55022
305MM*610MM



VT 55022
305MM*610MM

LET US
HELP YOU
ACHEIVE
YOUR GOALS

- ① UV coating
- ② High-density wear layer
- ③ Printing layer
- ④ Fiber-glass layer
- ⑤ Backing layer

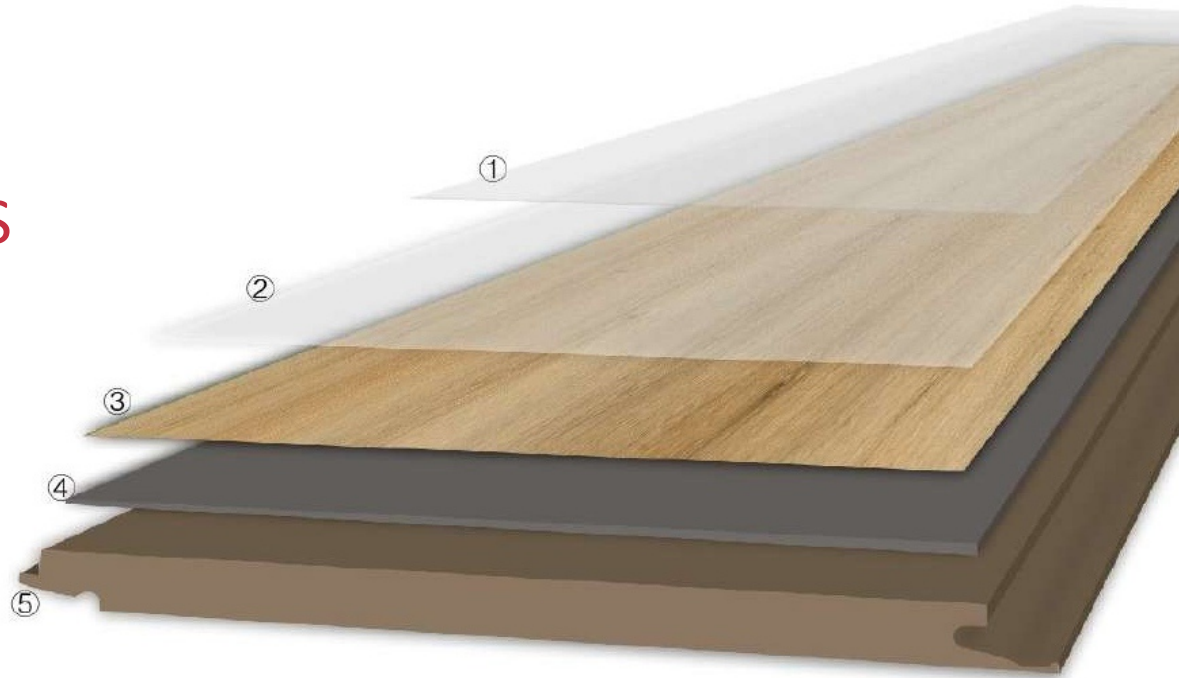

Click Vinyl Tile is an innovative form of vinyl flooring. It is becoming an increasingly popular and affordable alternative to wood or stone. The realistic look of either wood, stone or ceramic tile is extremely hard wearing and resilient to daily wear and tear. It has a scratch resistant surface and is waterproof, making it ideal for any area.

The product is made up of multiple thin layers so that the flooring is still flexible but very durable and easy to look after. The Click system ensures fast & simple installation.

CHARACTERISTICS STANDARD RESULT

Size	EN 427	Wood 180mm*1220mm/Concrete 305mm*610mm
Squareness / Straightness	EN 427	>0.2mm
Overall Thickness	EN 428	5.0mm
Wear Layer Thickness	EN 428	0.5mm
Warp	EN 434	±0.5mm (80°C, 6h)
Peeling Resistance	EN 431	Length 106.8N, Width 108.9N
Dimensional Stability	EN 434	>0.1% (80°C, 6h)
Wear Resistance	EN 660-2	≥0.015g/1000turns
Slip Resistance	DIN 51130	R9
Castor chair test	EN 425	No delamination
Residual Indentation	EN 433	>0.1mm
Mildew Resistance	ASTM G21	Level 1
Toxicity	EN 71-3	Pass
Corrosion Resistance	EN 423	Level 0
Color Fastness	ISO 105 B02	<6
Fire Resistance	ASTM E84-03	Bfl-S1
Gloss	—	+2gu